

The **A10W** is ATCOM entry level IP phone for general users with smart design. The single SIP account IP phone has been designed to be the most popular model for daily communication at office, cost-effective but high-level performance. With HD voice quality supported and enhanced speaker box equipped, it enable a high quality voice experience and all calls on it will be more like a face-to-face communication.



**Life-like Voice Quality**

The Rainbow Series is built for very highest level voice performance. It supports G.722 codec, which covers a wide range including both low frequency and high frequency bands, and it complies with TIA920 certification standards, enable calls with a HD voice quality just like you're face to face communicating with the other party. Furthermore, the Rainbow series have been the first IP phone that support full HD, such HD handset, HD speaker, and HD ring tones.

**Multi-language User Interface**

With a 132 x 52 dot matrix backlight LCD, multi-language is supported.

**Easy Configuration**

The Rainbow series is supported Auto Provisioning by TFTP / FTP / HTTP / PnP, which make installer configure and maintain all phones easier and more convenient.

**Compatibility**

The Rainbow Series Validated by Elastix and Broadsoft, to ensure an outstanding compatibility with leading VoIP platforms.

**Advanced Connectivity**

It's able to connect Rainbow 1 with LAN network by PoE technology (IEEE 802.3af Power over Ethernet) or WiFi technology (Optional), to clean redundant wires from your office table.

- » Elegant appearance
- » Cost effective
- » Full HD Audio (handset, speaker, ringtone)
- » Single SIP Account
- » Wireless 802.11 b/g/n supported
- » Desktop and Wall-mountable both



## Display Features

- LCD Display: 132 x 52 dot-maxtrix FSTN LCD
- LCD Comtrast: Adjustable
- LCD Backlight: Adjustable

## Install Option

- Desk Mount: Yes
- Wall Mount: Yes

## Network Features

- IP Version: IPv4
- IP Assignment: Yes (Static / DHCP / PPPoE)
- WiFi Connection: Optional
- HTTP: Yes
- SNTP Client: Yes
- VLAN (802.1Q): Yes
- QoS (DiffServ): Yes
- VPN: Yes (L2TP VPN supported)
- NAT Transverse: Yes (STUN mode)
- Security: Yes (SRTP / TLS supported)

## Others

- Power Consumption Standby: 1.0W, Working: 2.2W
- Operating Humidity: 10 - 90%
- Operating Environment: 0°C - 45°C (32°F - 113°F)
- Dimension (W x D x H): 170 x 182 x 132mm
- Weight: 1.0Kg

## SIP Features

- SIP Accounts: 1
- SIP Compatibility: SIP v1 (RFC2543), v2 (RFC3261), Asterisk, Broadsoft, ATCOM IP PBX

## Keys Features

- Programmable Keys: 0
- Features Keys: 7 (Menu, Hold, Redial, Mute, Headset, hands-free speakerphone, Message)
- Line LED Keys: 0
- Volume Control Keys: 2
- Context Sensitive Soft Keys: 3
- Navigation Keys: 4

## Configuration

- Plug & Play Configuration: Server based configuration
- Manual Configuration: Internal Web Configuration, Local (LCD based) Configuration
- Auto Provision:TFTP / FTP / HTTP / PnP

## Interface Features

- Ethernet Ports: 2x 10 / 100 Mbps PoE (Power over Ethernet): IEEE 802.3af Class 2 standard compliant
- Headset Jack: 1x RJ9
- Handset Jack: 1x RJ9
- Power adapter Jack: 3.5mm,DC 5.0V, 1.0A

## Audio Features

- Ringtones: 10+2 user define
- Ringer Volume: 8 levels + off
- Headset Port: RJ9
- Audio Codec: G.711(A/μ), G.722 (Wideband), L16 PCM (Wideband), G.726, G.729AB, iLBC

## Software Features

- Phone Book (Entries): 100
- Call Log Entries: 100 Incoming calls + 100 Outgoing Calls +100 Missed caslls
- Conferncing: 3 parties
- Music On Hold: Supplied by Host Service (PBX/SIP Server)


## Phone Basic Functions

One-Touch, Speed Dial, Redial,Call Forward, Call Waiting,Call Transfer,Call Hold, Call Return, Mute, Auto answer, DND,Call History: Dialed /Received/Missed, Direct IP Call without SIP Proxy, Hotline, Dail Plan, Set Date/Time Manually or Automatically

## Phone Functions with IP PBX

Anonymous Call, Anonymous Call Rejection, DND, Forward, Synchronization Message Waiting Indicator (MWI), Voice Mail, Call Park, Call Pickup Intercom, Paging, Music on Hold , Call Recording.

The Ultra-low **THD (Total Harmonic Distortion)** curve value makes you hear the original voice  
The perfect frequency response curve stands for zero defect on your voice communication.

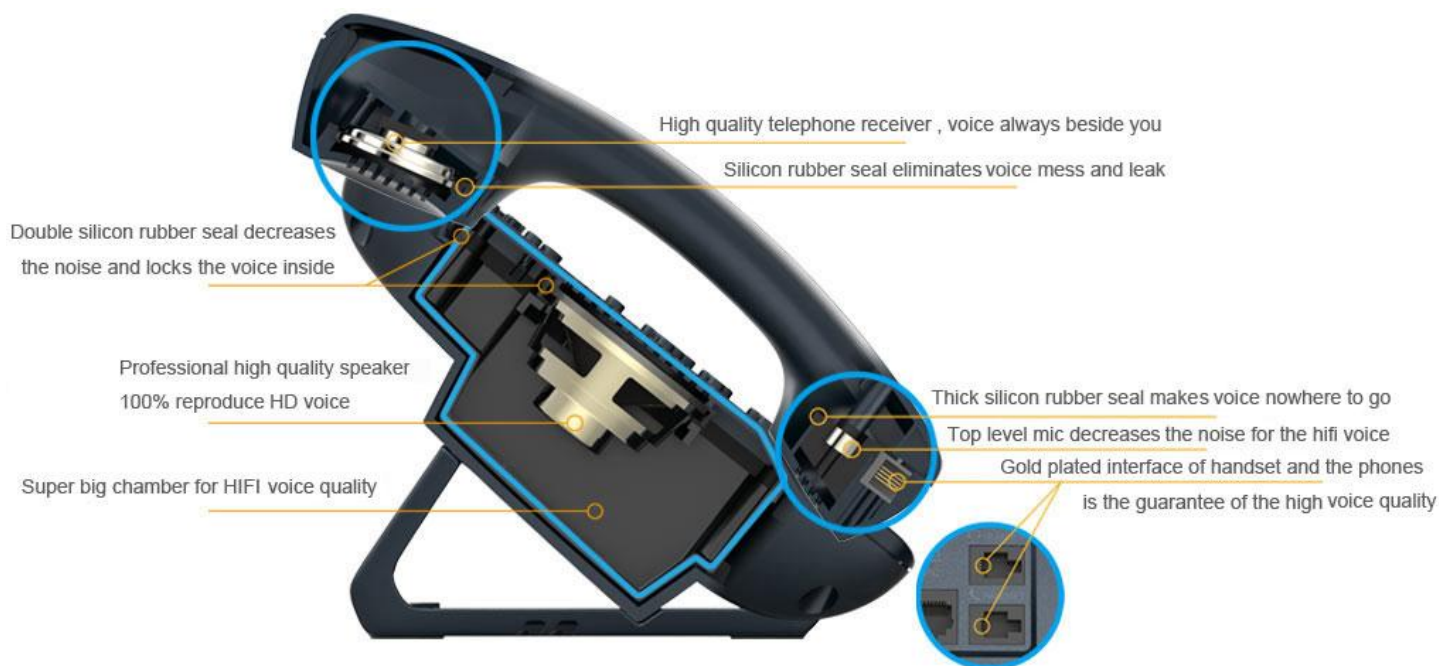

## ATCOM TECHNOLOGY CO.,LTD

Add: 2/F Block 3, Huangguan Industry Park, 9th Tairan Road, Futian, Shenzhen,China.

Tel: +86-755-83018618 Fax: +86-755-83018319

Website: www.atcom.cn